Parabolic antenna JRMD - 680 -10/11

www.jirous.com

Antenna JRMD – 680 – 10/11 is designed for microwave links at the frequency band 10 and 11 GHz. The new generation is coming in a deep reflector dish design with a massive holder.

Electrical parameters:

Frequency range	10.0 – 12.0 GHz
Gain – Low frequency	33.6 ± 1 dBi
Gain – High frequency	35.5 ± 1 dBi
Front to back ratio	≥ 55.5 dB
XPD	≥ 35 dB
Beamwidth$_{-3\ dB}$	3° ± 0.5°
Return loss	≥ 18 dB$_{/10.3 - 11.7\ GHz}$
Polarization	Linear, vertical/horizontal
Electrical Compliance	US FCC Part 101A | 10.550 – 10.680 GHz US FCC Part 101B | 10.7 – 11.7 GHz **Class 2** ETSI EN 302-217-4-2

Mechanical parameters:

Parabola	ø 68 cm, Aluminium alloy
Radome	UV steady plastic ABS
Input/output	Circle waveguide Ø 19 mm
Installation on mast	ø 40 - 120 mm
Operating wind load	180 km/h (112 mph)
Survival wind load	240 km/h (149 mph)
Weight of antenna	5.1 kg (11.2 lbs.)
of holder	3.2 kg (7.0 lbs.)
Shipping dimension	800 x 800 x 350 mm/ 12.3 kg (27.1 lbs.)

Parabolic antenna JRMD - 680 -10/11

www.jirous.com


Usage:


- deep parabola for better parameters
- **easy to assembly:** first the holder and then the antenna only by 2 screws
- **fine setting** elevation (of gradient) and azimuth ± 20°
- extreme wind stability

The antenna is supplied with a holder that allows easy mounting on a mast. The holder can be installed separately on the mast. Subsequently, you can simply hang up the antenna with microwave unit into it. The holder allows precise adjustment in both directions. Ready for right and left side mounting.
In the areas with the expected occurrence of the strong winds mounting on the mast with minimal ø 50 mm is recommended.

Parabolic antenna JRMD - 680 -10/11

Measurement of radiation pattern:

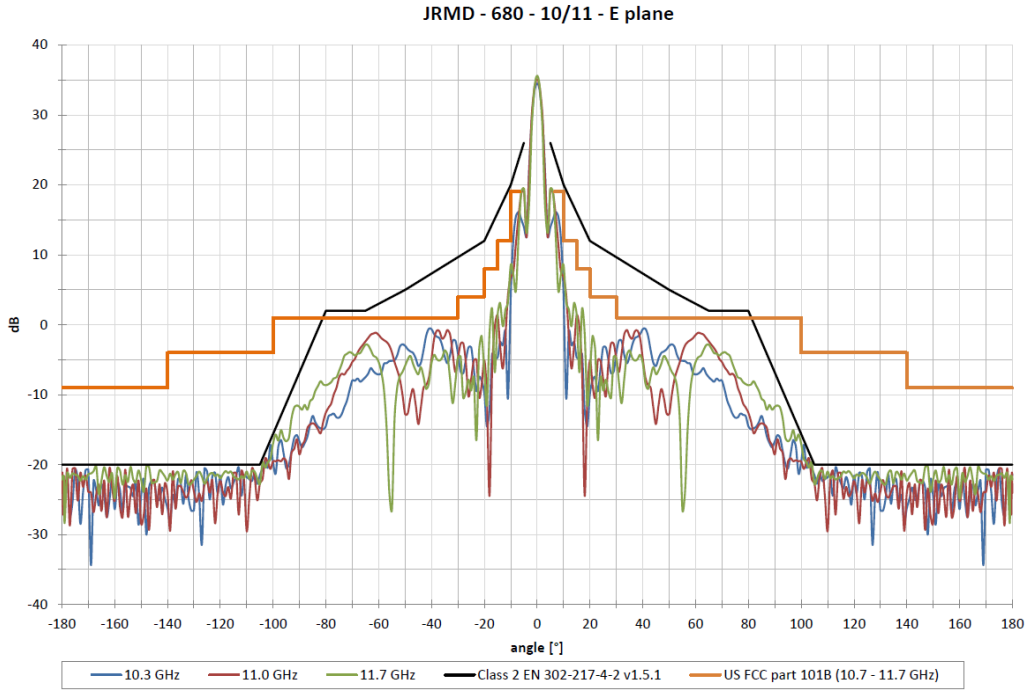


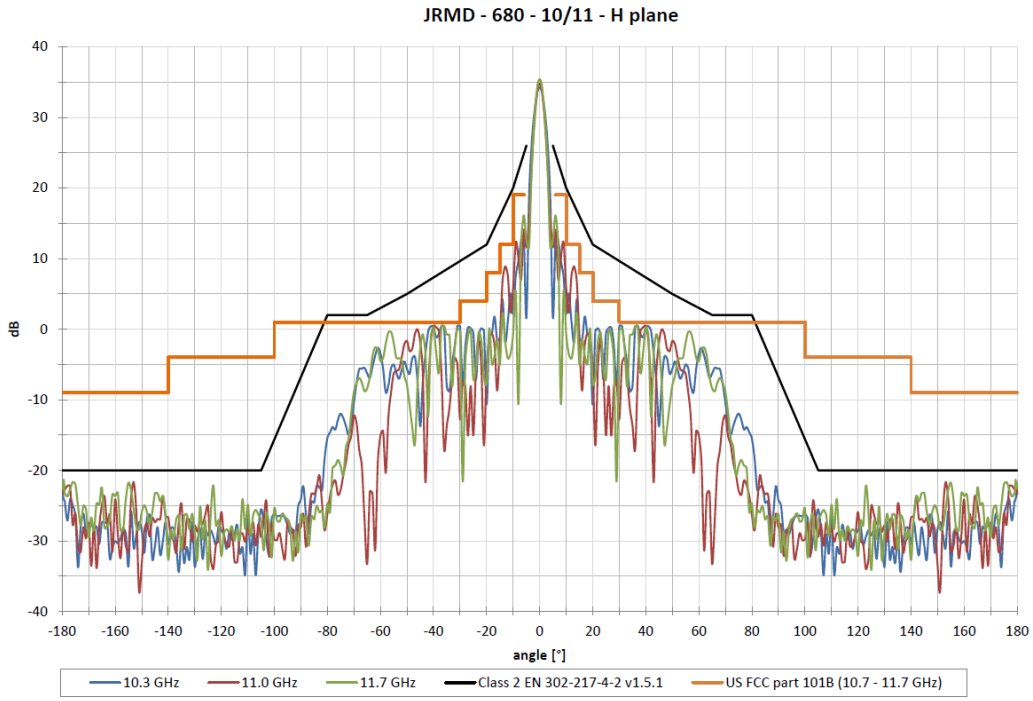


Parabolic antenna JRMD – 680 –10/11


www.jirous.com

Outline:

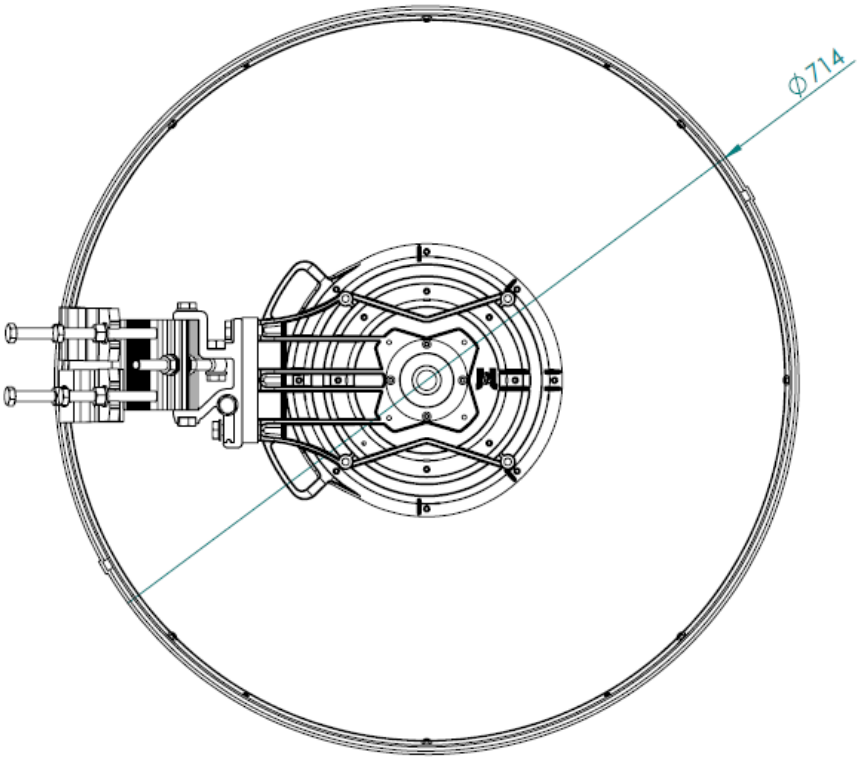

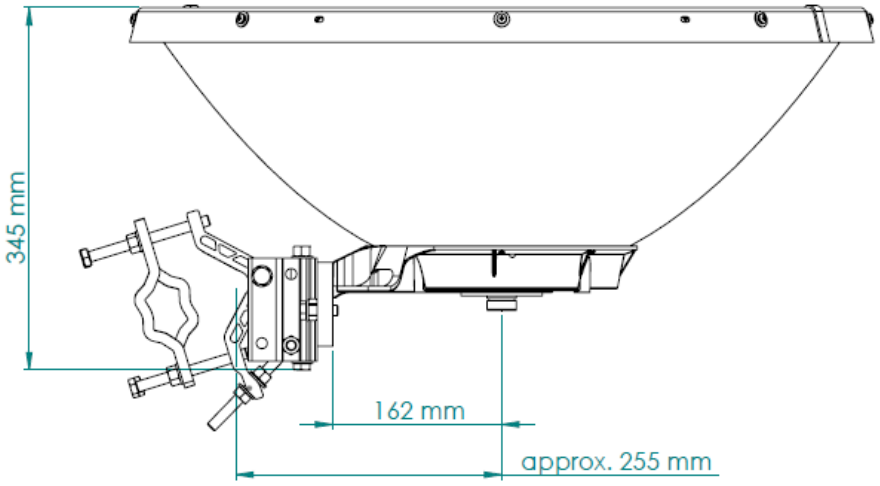

Wind loading:

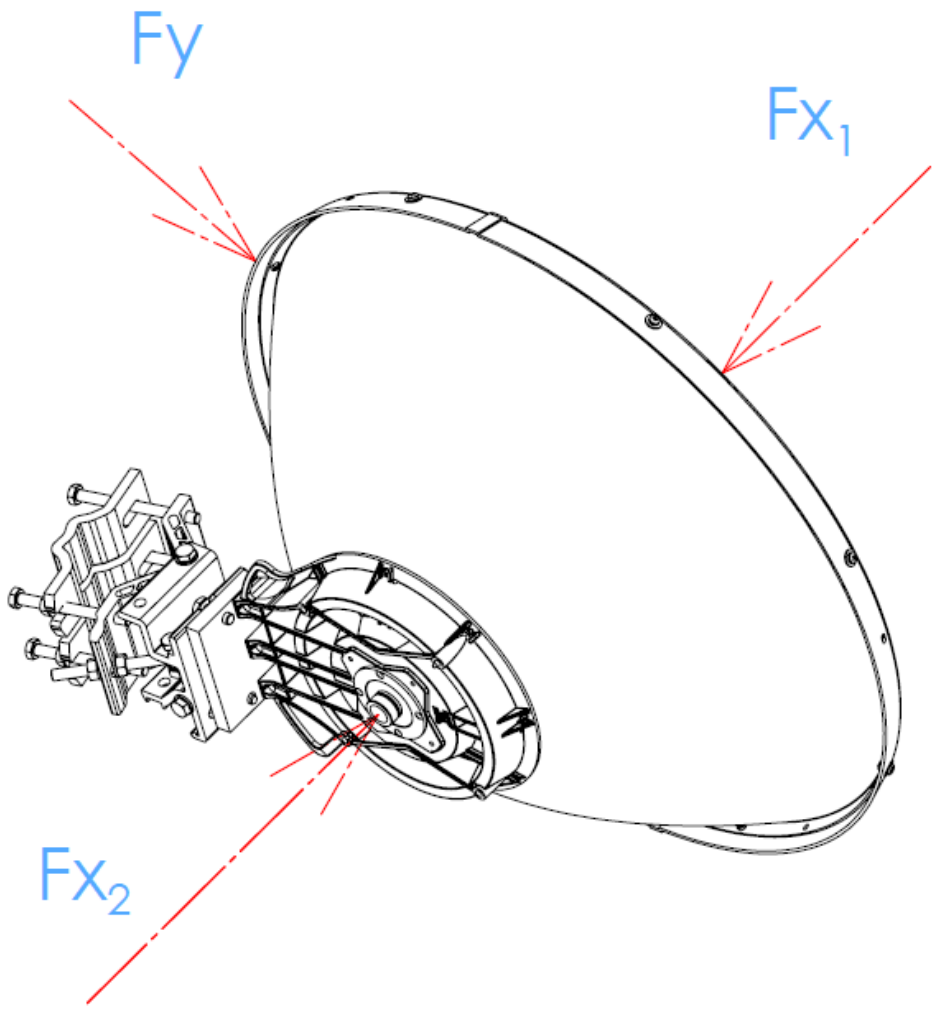

Wind Loading at 200 km/h [125 mph]

Direction	Force [N]	Force [lbf]
Fx_1	707	158,9
Fx_2	792	178
Fy	71	15,9