Parabolic antenna JRC-35DD MIMO Precision

www.jirous.com

Dual-polarized parabolic antenna **JRC-35 Deep Dish MIMO Precision** is designed for directional links with MIMO mode at the frequency band 5 GHz. The antenna is designed for environments with multiple reflections for very long or medium distances in difficult conditions. **Its design with deep dish increases isolation among antennas on a mast and increases front to back ratio. The new concept expands the frequency band.**

Other models: **JRC-35DD MIMO PriS–** antenna for dual-polarized radio UBNT PrismStation


Electrical parameters:


Frequency range	4.9 – 6.4 GHz
Gain	35 ± 1 dBi
VSWR 5.1 – 5.9 GHz	≤ 1.4
Beamwidth -3 dB	3.1˚
Port to port isolation 5.1 – 5.9 GHz	26 dB
Front to Back ratio	≥ 53 dB
Polarization	Linear, vertical/horizontal or 45°

Mechanical parameters:

Parabola	Ø 1200 mm, Aluminium alloy
Radome	UV steady plastic ABS
Type of connector	N-female, R-SMA
Installation for mast	Ø 80 - 120 mm
	Ø 60 - 80 mm with adjustable wind bracing set
Operating wind load	110 km/h (68 mph) without wind bracing set
	140 km/h (87 mph) with wind bracing set
Survival wind load	210 km/h (131 mph)
Weight of antenna	29 kg 64 lbs.)
Shipping dimensions – 1pc	1310 x 740 x 1440 mm/66.5 kg (147 lbs.)
Shipping dimensions – 2pcs	1310 x 1100 x 1440 mm/102 kg (225 lbs.)


Radiation pattern:

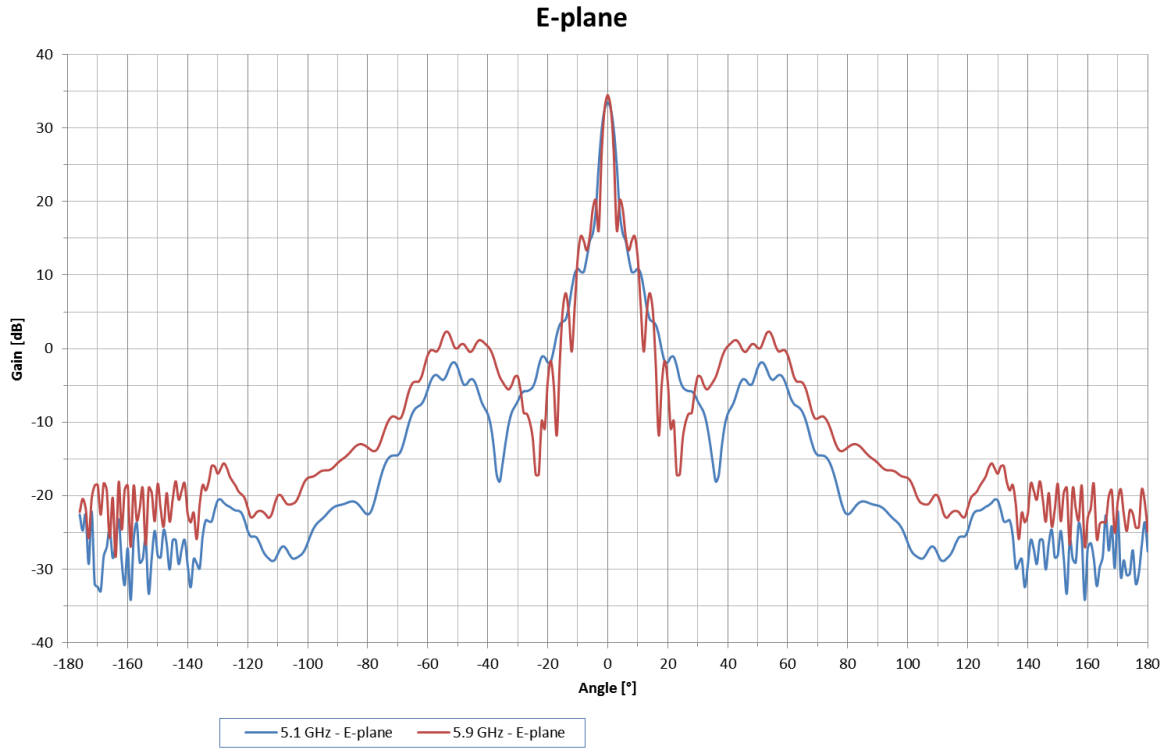


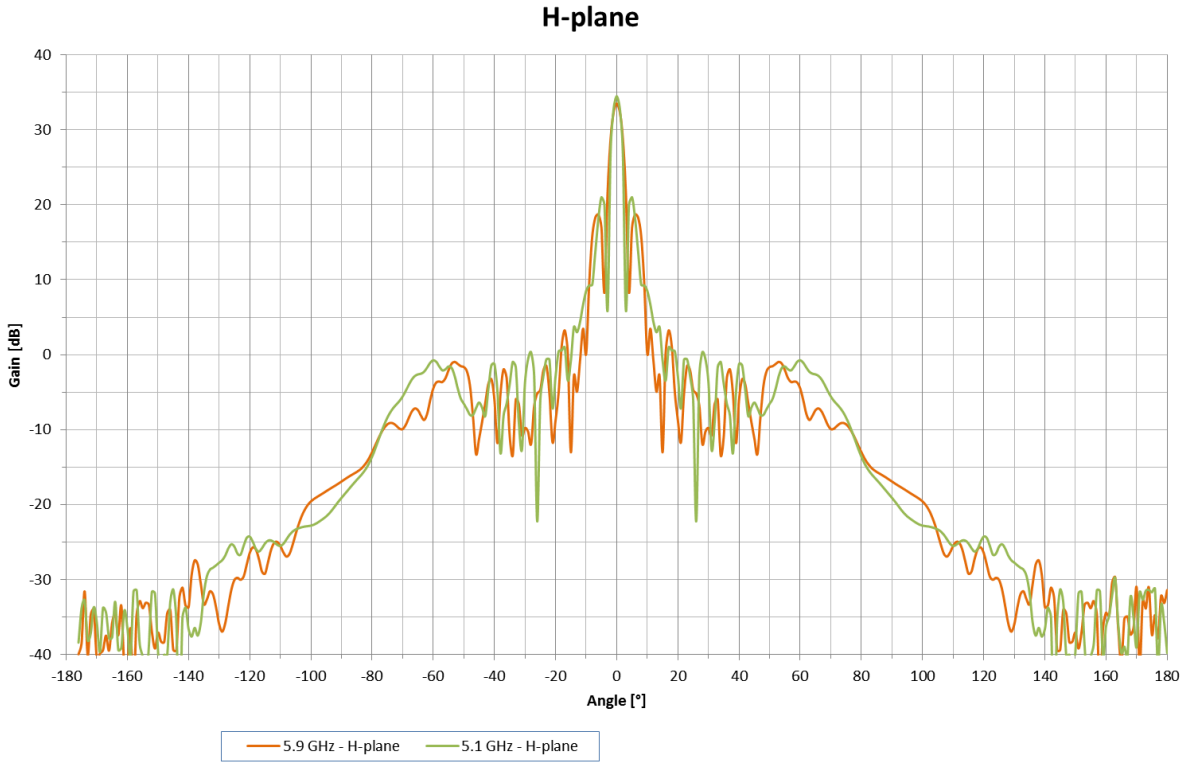


Parabolic antenna JRC-35DD MIMO Precision


Outline:

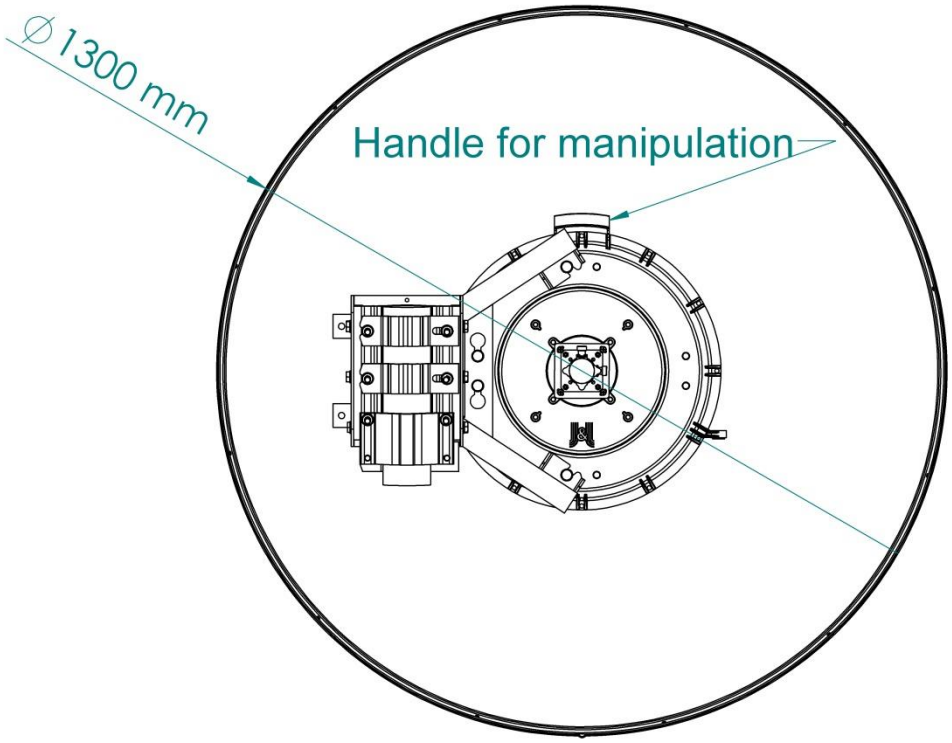

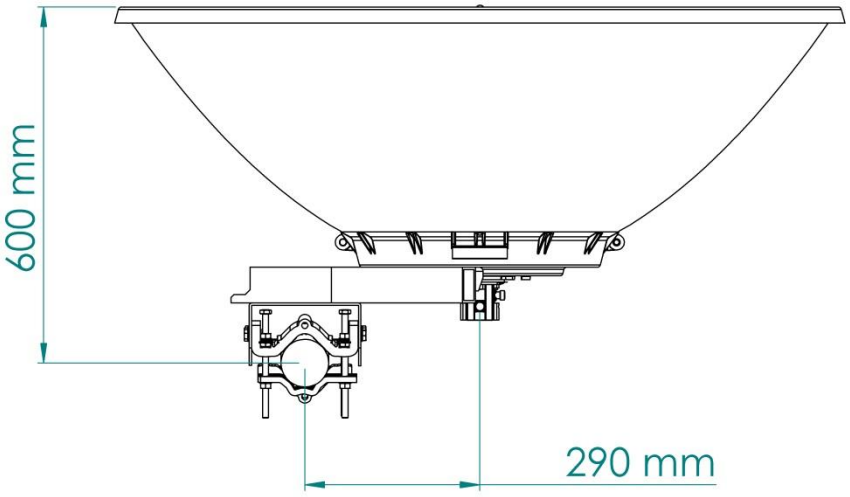

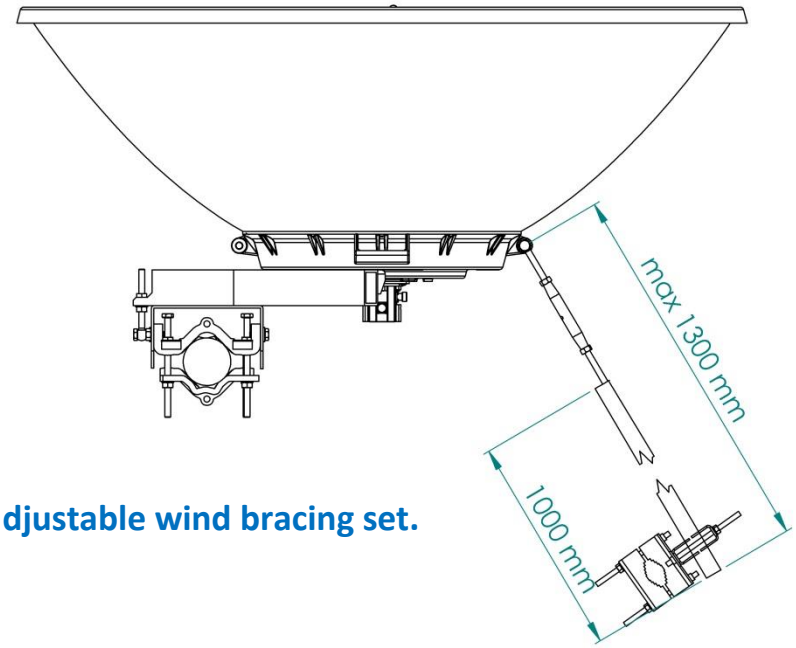


Antenna with adjustable wind bracing set.

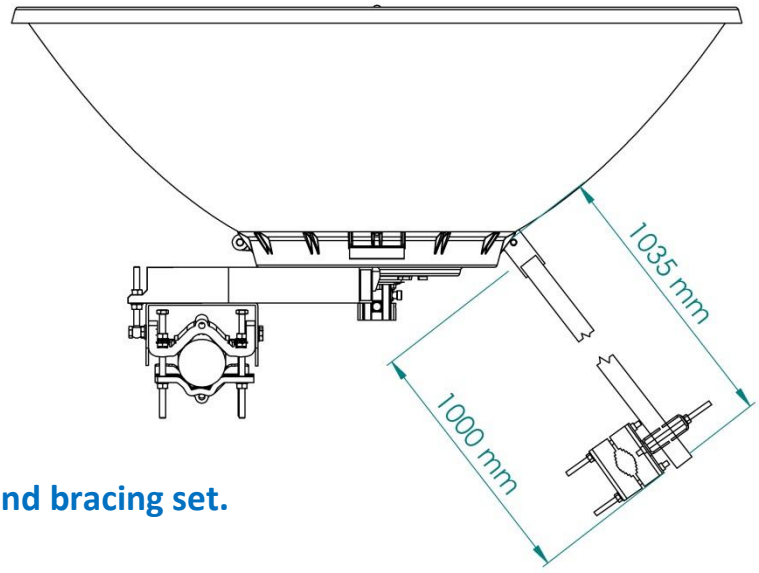

Antenna with wind bracing set.

Wind loading:

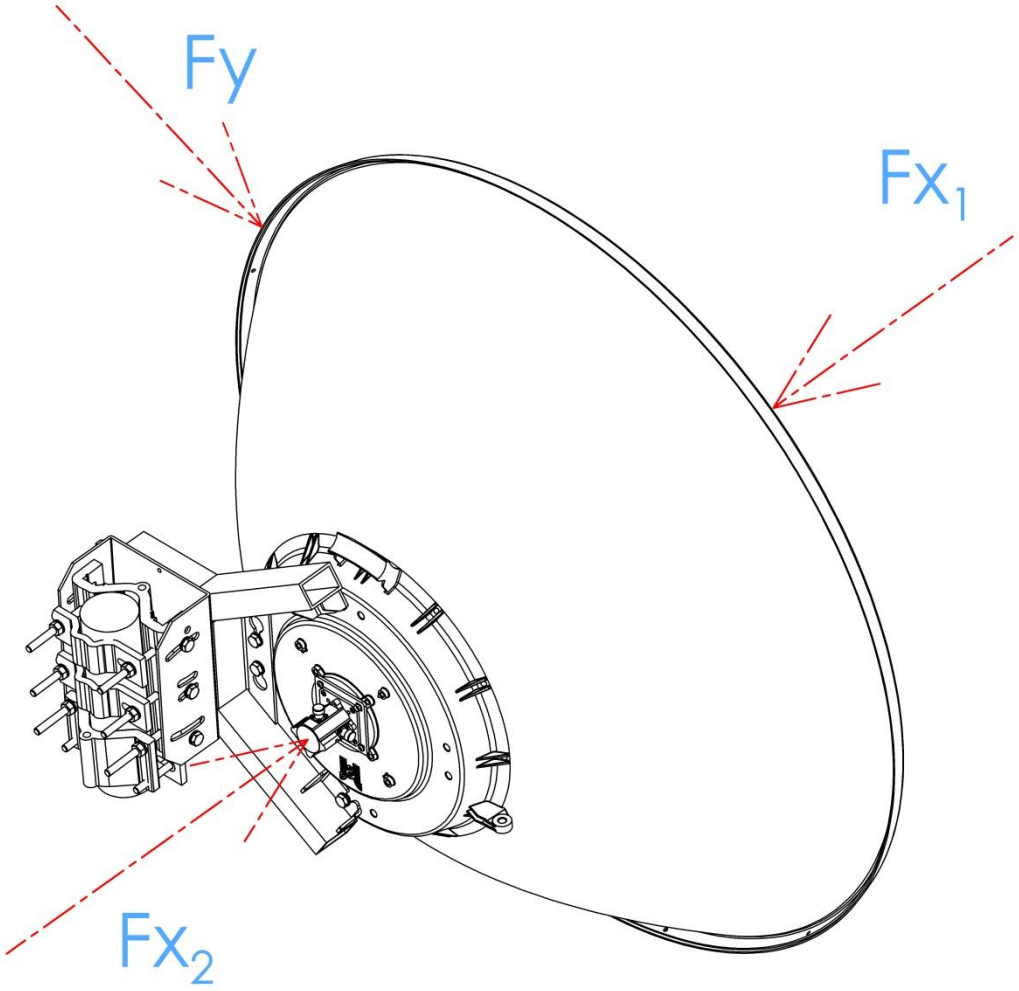

Wind Loading at 200 km/h [125 mph]

Direction	Force [N]	Force [lbf]
Fx_1	2696	606
Fx_2	2186	491.4
Fy	247	55.5